



## Cobra Boomslang

**Weight:** 4.37 oz

**Inside Diameter of Aperture:** 1.652"

**MSRP:** \$54.75 (black) (manufacturer)

**Warranty:** Lifetime warranty against defects in material and workmanship

### Introduction and General Comments:

The Cobra Boomslang requires some assembly. The sight is extremely lightweight. The sight consists of angled pins that travel on tracks that align pins on the same vertical plane.

### Adjustability: Scored 3.75 points

The typical ranges experienced per this evaluation were:

Maximum: 17.00 points

Minimum: 3.00 points

### Craftsmanship/Workmanship: Scored 14.00 points

The typical ranges experienced per this evaluation were:

Maximum: 20.00 points

Minimum: 5.00 points

### Fiber Durability: Measurement 2.83 lbs


The typical ranges experienced per this evaluation were:

Maximum: 4.00 lbs

Minimum: .100 lbs

Note: Fiber depth within aperture measured from the rear of the sight 0.00", the aperture has several cutouts.

### Fiber Illumination:

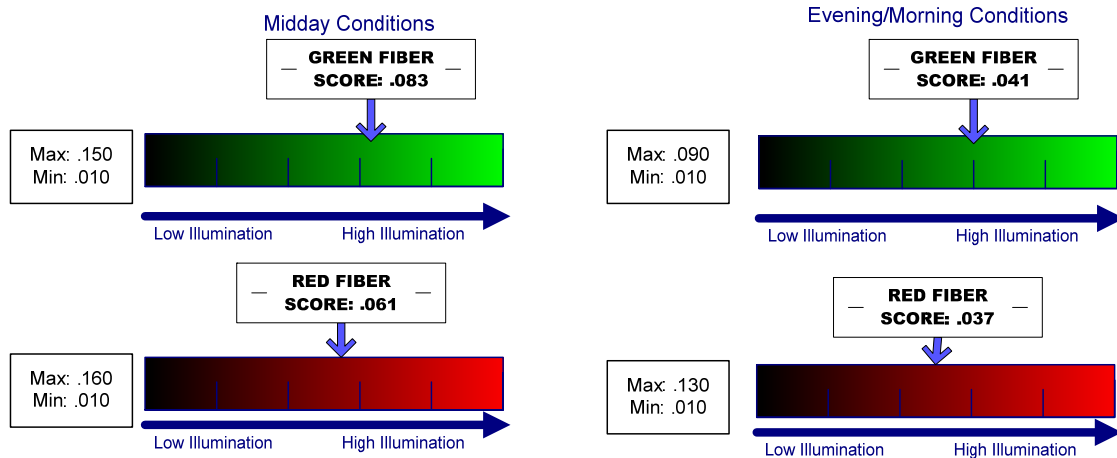

### Vibration Analysis

This analysis revealed no movement in windage, elevation or pins. Little to no additional noise was experienced during the two minute cycle. No physical damage occurred.



**ARCHERY EVOLUTION  
SYRACUSE, NY**

**[www.ArcheryEvolution.com](http://www.ArcheryEvolution.com)**

#### Disclaimer of Warranties; Limitation of Liability

The authors have made reasonable efforts to ensure the accuracy and validity of its testing, however, the authors specifically disclaim any warranty, expressed or implied, relating to the test results and analysis, their accuracy, completeness or quality, including any implied warranty of fitness for any particular purpose. All persons or entities relying on the results of any testing do so at their own risk, and agree that the authors shall have no liability whatsoever from any claim of loss or damage on account of any alleged error or defect in any testing procedure or result. In no event shall the authors be liable for indirect, special, incidental, or consequential damages in connection with its testing.